


UHF RECEIVER RX-UHF-MB

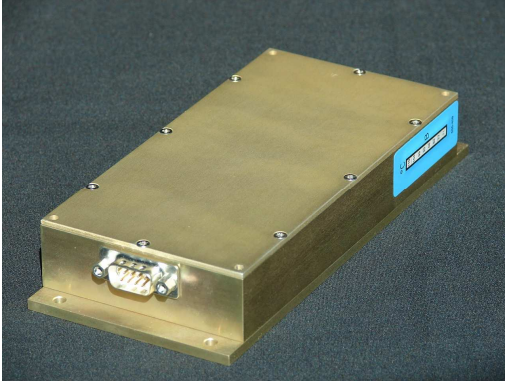

AIRBORNE DIGITAL TELEMETRY RECEIVER

- Frequency range: 400 to 470 MHz.
by 10 MHz sub-bands.
- Noise figure: < 2 dB.
- Dynamic input: -20 dBm to -100 dBm.
- Maximum input level : +10 dBm.
- Sensibility: -95 dBm
- Synthesized.
- Programming increments: 12.5 KHz step.
- Frequency accuracy: ± 2 ppm at 25 °C.
- Frequency stability: ± 3 ppm from -10°C to +70°C.
- Démodulation: FSK .
- Data rate: 115.2 Kbps, 57.6 Kbps,
38.4 Kbps, 19.2 Kbps,
9.6 Kbps (factory setting)

- Data output: RS232 or RS485 (always Master)
- Monitoring & Control: RS232 9600 Bps

POWER REQUIREMENT

- 28 V DC (20 V min to 36 V max).
- < 200 mA for 28V.
- Reverse polarity protection.

ENVIRONMENTAL CONDITIONS

- Operating temperature range : -20 to +60° C.
- Vibration: 10 Hz to 400 Hz, 10 g-c.
Random 0.4 g²/Hz from 10 to 400 Hz.
- Shock: ½ sinus 6 ms, 80 g.
- Acceleration: 80 g.

DIMENSIONS

- 180 x 80 x 30 (mm).
- Weight : 550 g.
- RF input connector : SMA.
- Power Supply, RS232 M&C : Type « D » 9 pins male.

OPTIONS

- Other frequencies sub-bands.
- Other modulations (on request).
- Selective address setting (consult us).
- FEC (consult us).

*Specifications subject to change without notice

Distributed by AA SYSTEL
Contact: Mr. Gerard FOURREAUX
Tel.: 33 1 69 63 86 30 Mobile: 33 6 75 23 94 32
E-mail: Gerard.fourreaux@a-a.fr